

## DKT200 Series

# Dry Bath Incubator

DKT200 Series Dry bath incubator is a microprocessor-controlled device, high precision of temperature control, sample preparation parallelism, as an alternative to the traditional water bath device. It can be widely used in various samples of the cultivation, preservation and reaction. Application of industry includes the pharmaceutical, chemical, food safety, environment, quality inspection.



DKT200-1



DKT200-2



DKT200-4

### Feature

*Ensure quality, service and development, the pursuit of excellence and persistence!*

1. LCD display. Cool and compact designed appearance.
2. Fast heating speed, uniform heating, accurate temperature control, high stability, low energy consumption and no noise.
3. Built in temperature calibration function, automatic fault detection and buzzer alarm function.
4. Built in over-temperature protection device, safe and reliable, enhance the service life of the machine.
5. Product designed compact and tight, occupied little space, free and easy.
6. Various blocks for convenient replacement, easy for cleaning and disinfection.



# Dry Bath Incubator

## Parameters

Ensure quality, service and development, the pursuit of excellence and persistence!


Model	DKT200-1	DKT200-2	DKT200-4
Temp.Control Range	R.T.+5 ~ 150 °C	R.T.+5 ~ 150 °C	R.T.+5 ~ 120 °C
Temp.Setting Range	5 ~ 150 °C	5 ~ 150 °C	5 ~ 120 °C
Temp.Stability @40~100 °C	≤±0.5 °C	≤±0.5 °C	≤±0.5 °C
Temp.Stability @ >100 °C	≤±1 °C	≤±1 °C	≤±1 °C
Block Temp.Uniformity @40 °C	≤±0.3 °C	≤±0.3 °C	≤±0.3 °C
Block Temp.Uniformity @>100 °C	≤±0.5 °C	≤±0.5 °C	≤±0.5 °C
Temp Display Accuracy	0.1 °C	0.1 °C	0.1 °C
Heating Speed	≤30min(20 to 150 °C)	≤30min(20 to 150 °C)	≤30min(20 to 120 °C)
Time Range	1min~99h59min or continuous	1min~99h59min or continuous	1min~99h59min or continuous
Sample Capacity	1 standard block	2 standard blocks	4 standard blocks
Voltage	AC 220V/AC 110V,50/60Hz	AC 220V/AC 110V,50/60Hz	AC 220V/AC 110V,50/60Hz
Power	200W	400W	600W
Fuse	250V,2A/3A,Φ5x20	250V,2A/3A,Φ5x20	250V,5A/10A,Φ5x20
Dimension (WxDxH)	200x230x95mm	220x260x95mm	220x360x95mm
Net Weight	2.6kgs	3.3kgs	4.7kgs



# Dry Bath Incubator

## Optional Accessories

Ensure quality, service and development, the pursuit of excellence and persistence!

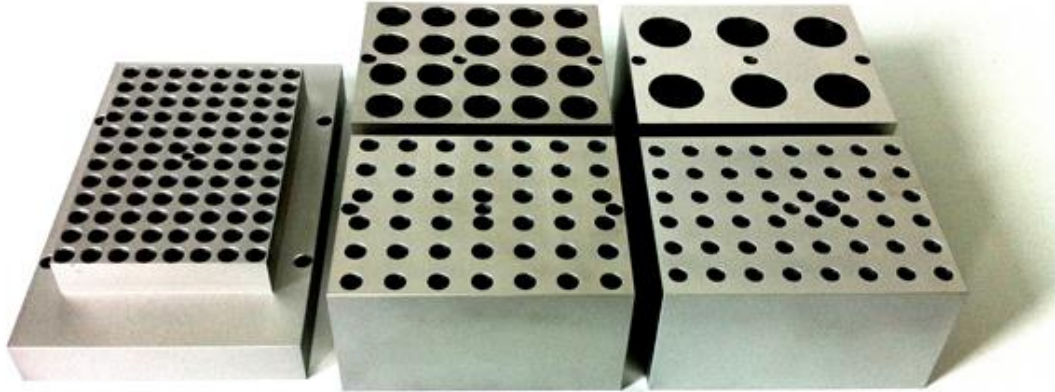

Cat#	Spec	Dia. of hole	Hole bottom shape	Block dimension
DT01	6 mm x 42	6.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT02	7 mm x 42	7.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT03	10 mm x 20	10.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT04	12 mm x 20	12.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT05	13 mm x 20	13.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT06	15 mm x 12	15.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT07	16 mm x 12	16.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT08	19 mm x 12	19.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT09	20 mm x 6	20.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT10	26 mm x 6	26.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT11	28 mm x 4	28.5 mm	Flat bottom	95.5 x 76.5 x 50 mm
DT12	40 mm x 2	40.5 mm	Round bottom	95.5 x 76.5 x 50 mm
DT13	0.5 ml x 42	8 mm	Cone bottom	95.5 x 76.5 x 50 mm
DT14	1.5 ml x 24	10.8 mm	Cone bottom	95.5 x 76.5 x 50 mm
DT15	2.0 ml x 24	10.8 mm	Round bottom	95.5 x 76.5 x 50 mm
DT16	0.2 ml x 48	6.1 mm	Cone bottom	95.5 x 76.5 x 50 mm
DT17	0.2 ml x 96	6.7 mm	Cone bottom	95.5 x 153.5 x 33.5 mm
DT18	Flat bottom plates	Top size 76 x 116 x 4 mm	Flat plate block	95.5 x 135 x 22.5 mm
DT19	Customized	Customized	Customized	Customized

