



Water Purifier (RO & DI water) SCSJ-I

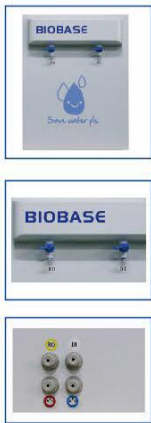

Features:

- ①. 4 filters process.
- ②. Automatic RO membrane flush.
- ③. Filtration Velocity: 10L/H.

Purifying procedure

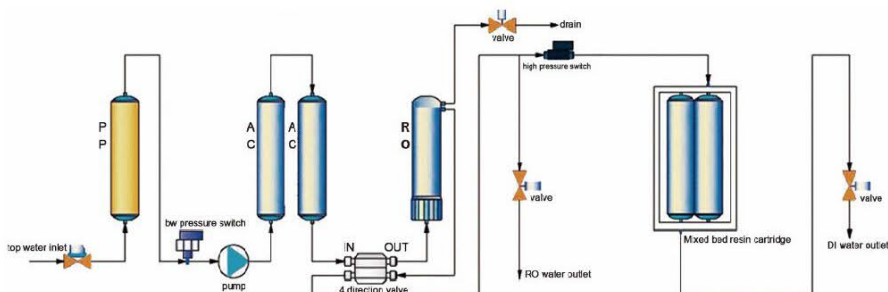

PF: Pretratment Filter AC: Activated Carbon RO: Reverse Osmosis DI: Ion Exchange

Parameters:

Model	SCSJ-I	
Water Output Type	RO and DI water	
Water Output Speed	10L/H	
Purifying Procedure	PF+AC+RO+DI	
Water Supply Equirement	Tap water: TDS<200ppm, 5~45°C, 1.0~3.5Kg/cm ²	
Purification System	Pre-treatment unit	10"PP filter*1+10"Activated carbon*2
	RO unit	100GPD RO membrane*1
	Subsequent unit	Deion purification column*2
Pure Water Quality	•Soluble organic matter: Rejection rate>99% (molecular weight>100)	
	•Particle: Rejection rate>99%	
	•Microbe: Rejection rate>99%	
	•Salt rejection rate: near 100%	
	•TDS (total solids solubility): RO water: 5~10 ppm	
	•Resistivity: 7.0~10.0 MΩ·cm	
	•Conductivity: 0.143~0.100 μs/cm	
Water Quality Monitor	•PM (particulate matter) (>0.22μm): <1/ml	
	•Microbe/Germ: <1 CFU/ml	
	TDS (Total Dissolved Solids) meter	
Power Supply	AC110/220V, 50/60Hz	
Consumption	48W	
Standard Configuration	Main body (Include 1 set of cartridges)+TDS meter	
Package Size(W*D*H)	531*551*621mm	
Gross Weight	38kg	